


USER INSTRUCTIONS




For further information please contact your probe distributor

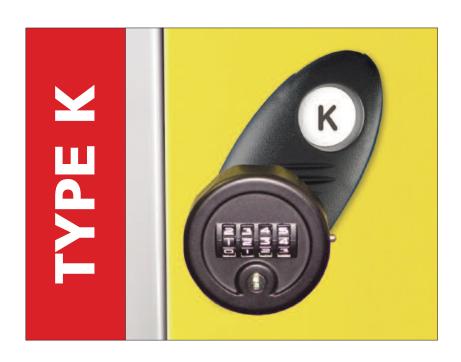

storage solutions worth looking into...


STEP 1

Your Combination Lock is set at the factory to open at "-0-0-0-0" To set the new code, you need to turn dials to the correct code firstly.



STEP 2

press and hold the code setting button



STEP 3

Set dials to the desired combination and release the button.



STEP 4

Scramble the new code to lock the door.



For further information please contact your probe distributor



storage solutions worth looking into...


PROCEDURE TO OPEN LOCK IN CASE OF CODE LOSS

Step 1 Insert decoder into gap between dial and lock casing as per the illustration below

Step 2 Hold decoder lightly and turn the dials through the number sequence

Step 3 When you reach the correct number the decoder will 'sink' into the gap

Step 4 Repeat the above steps for each dial until you have found all 3 numbers

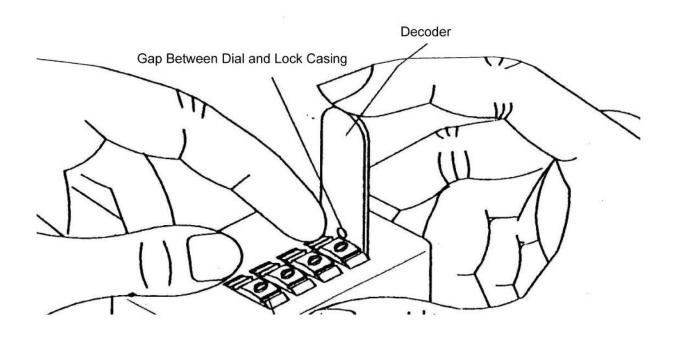

For further information please contact your probe distributor

